

Unifire Nozzles

*World Renowned
Professional Nozzles*



UNIFIRE

Unifire Nozzles AB

Bultgatan 40 | 442-40 Kungälv | Sweden

Info@UnifireNozzles.com

UnifireNozzles.com



Made in Sweden

UNIFIRE NOZZLES AB


Since our founding in Sweden in 1969, Unifire has been a trusted manufacturer and distributor of the highest-quality firefighting and industrial nozzles available anywhere on the market.

At Unifire, we are committed to providing our customers with the highest quality equipment available.

We confidently and fully back our equipment with our generous guarantees, and we constantly strive to provide outstanding customer service and support to each and every one of our valued customers.

We thank you for your interest in our company and our products, and we are always ready to work with you to provide the perfect solutions for your needs.

Mattias Eggert
Managing Director

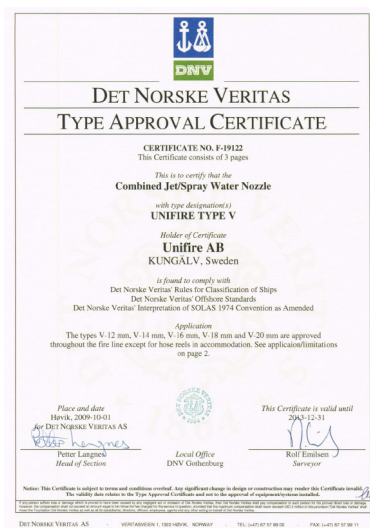

PROFESSIONAL BRASS NOZZLES

UNIFIGHTER™ Series

UNIFIGHTER™ 7C and 10C

Multi-purpose nozzles for small fires, bush fires, etc. Very efficient and reliable. Also well suited for heavy industrial use. Available in 2 sizes (7C and 10C) with any thread connection ½" to 2" or with any hosetail connection. Operating Pressure: 2-20 Bar. Material: chrome-plated brass, plastic handle and rubber head.



UNIFIGHTER™ 7C and 10C Pistol



We offer our Unifighter 7C and 10C nozzles with the added feature of a convenient pistol grip. Professional nozzle for firefighting and industrial use, delivering a constant flow regardless of fog angle.

UNIFIGHTER™ Short Nozzle

Convenient, compact, light-weight, multi-purpose nozzle. Perfect for small fires and numerous industrial applications. Available with any thread connection ½" to 2" or with any hosetail connection. Operating Pressure: 2-20 Bar.





PROFESSIONAL BRASS NOZZLES

The Classic V-Nozzle™

V-Nozzle

Known and trusted around the world, the Unifire V-Nozzle™ is a multi-purpose fog nozzle renowned for its exceptional fog and jet performance. Engineered for heavy-duty professional marine applications, it delivers reliability and control in the most demanding environments.

With no maintenance required, the V-Nozzle is available with 1" or 2" male threads as standard and in a wide range of sizes: V10, V12, V14, V16, V18, and V20.



V-Nozzle Pistol



We offer our world-renowned V-Nozzles with the added feature of a durable, ergonomic pistol grip for enhanced comfort and control.

Designed for professional firefighting and demanding industrial use, this model combines exceptional fog and jet performance with superior handling in high-pressure situations.

UNIFIGHTER™ Short Nozzle

Convenient, compact, light-weight, multi-purpose nozzle. Perfect for small fires and numerous industrial applications. Available with any thread connection ½" to 2" or with any horsetail connection. Operating Pressure: 2-20 Bar.



PROFESSIONAL BRASS NOZZLES

The OUTPUT™ Nozzle

OUTPUT

The OUTPUT Nozzle™ delivers an exceptionally efficient fog pattern and is simple to operate, making it ideal for use by non-professionals in industrial facilities, public areas, tunnels, and voluntary fire brigades.

Built from saltwater-resistant materials, it offers reliable performance and minimal maintenance.

Available in 220, 300, and 400 LPM / 6 bar versions.



OUTPUT Pistol

The OUTPUT Pistol Nozzle™ combines the efficient fog performance of the classic OUTPUT with the added convenience and control of a pistol grip.

Designed for comfort, precision, and ease of handling, it is ideal for industrial, public, and firefighting applications.

Built in Sweden to the highest standards, it delivers unmatched reliability, precision, and ease of use.

Available in a variety of sizes.





PROFESSIONAL BRASS NOZZLES

The JETSET™ Nozzle

JETSET Fog/Jet Nozzle

Extremely efficient and easy to use. Designed for ACTION-technique interior attack. Simple twist operation.

Opens with a wide fog screen to protect the operator. Water-saving jet for simple and efficient mop-up.

Operated by a large number of fire brigades as well as the Swedish Navy and Air Force. Supplies multiple-setting choices by the mere twist of the nozzle head. 50-150-330 LPM setting.



JETSET Pistol

Extremely efficient and easy to use with a heavy-duty pistol grip for easy handling and host-pulling. Designed for ACTION-technique interior attack. Simple twist operation.

Opens with a wide fog screen to protect the operator. Water-saving jet for simple and efficient mop-up.

Operated by a large number of fire brigades as well as the Swedish Navy and Air Force. Supplies multiple-setting choices by the mere twist of the nozzle head. 50-150-330 LPM setting.





Article No: UFC10

Unifighter 10C



The Unifighters are professional nozzles for firefighting and industrial use. The Unifighters are available with two different capacities: 7C, and 10C. They deliver a constant flow regardless of fog angle.

How to operate

Twist the nozzle head to select spray-pattern
-Stepless adjustable from shut-off via protecting screen to fog to jet

Applications

All-round nozzle for smaller fires, bush fires e.t.c.
Very efficient and reliable.
Also well suited for heavy industrial use.

Operating pressure

2 - 15 bar
Max operating pressure: 20 bar

Weight

Short Version : 0.5 kg
Long Version: 0.7 kg

Measurements


Short Version : L: 12.5 cm Ø: 5.2 cm
Long Version: L: 25 cm Ø: 5.2 cm

Material

Chromeplated brass, red plastic cover and rubber bumper head. Stainless steel screws and silicone oil lubrication

Connections

Available in short or long version with any thread connection 1/2" to 2" or with any hositail connection.

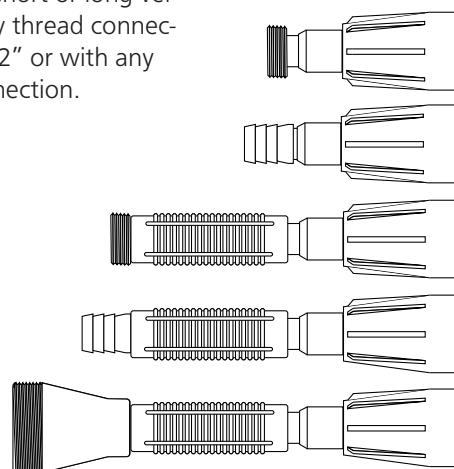

Capacities Unifighter 10C

Pressure Bar	Fog 100°		Jet	
	lpm	Distance/m	lpm	Distance/m
3	108	max 7	108	10-14
6	152	max 11	152	18-22
8	177	max 12	177	21-24
10	197	max 13	197	22-26

Article No: UFC07

Unifighter 7C



The Unifighters are professional nozzles for firefighting and industrial use. The Unifighters are available with two different capacities: 7C, and 10C. They deliver a constant flow regardless of fog angle.

How to operate

Twist the nozzle head to select spray-pattern
-Stepless adjustable from shut-off via protecting screen to fog to jet

Applications

All-round nozzle for smaller fires, bush fires e.t.c.
Very efficient and reliable.
Also well suited for heavy industrial use.

Operating pressure

2 - 15 bar
Max operating pressure: 20 bar

Weight

Short Version : 0.5 kg
Long Version: 0.7 kg

Measurements


Short Version : L: 12.5 cm Ø: 5.2 cm
Long Version: L: 25 cm Ø: 5.2 cm

Material

Chromeplated brass, red plastic cover and rubber bumper head. Stainless steel screws and silicone oil lubrication

Connections

Available in short or long version with any thread connection 1/2" to 2" or with any hoesail connection.

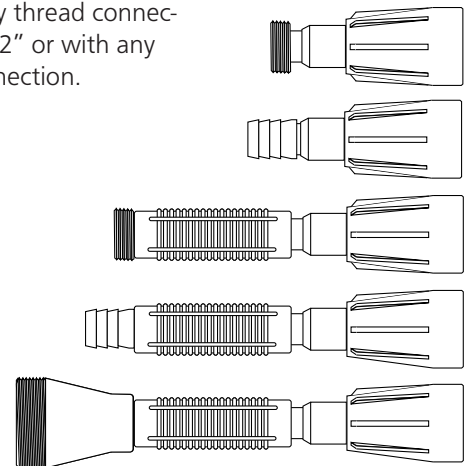

Capacities Unifighter 7C

Pressure Bar	Fog 100°		Jet	
	lpm	Distance/m	lpm	Distance/m
3	53	max 4	53	11-13
6	76	max 6	76	15-17
8	89	max 7	89	16-19
10	99	max 8	99	17-20



Unifighter 7C and 10C Pistolgrip

for firefighting and industrial use



**NEW ergonomic pistolgrip
made of stainless steel
and solid rubber !!**

The Unifighters are professional nozzles for firefighting and industrial use. The Unifighters are available with two different capacities: 7C, and 10C. They deliver a constant flow regardless of fog angle.

How to operate

Twist the nozzle head to select spray-pattern
-Stepless adjustable from shut-off via protecting screen to fog to jet

Applications

All-round nozzle for smaller fires, bush fires e.t.c.
Very efficient and reliable.
Also well suited for heavy industrial use.

Operating pressure

2 - 15 bar
Max operating pressure: 20 bar

Weight

Pistol grip with 1" male threads: 1,3 Kg

Measurements

Short Version : L: 12.5 cm Ø: 5.2 cm
Long Version: L: 25 cm Ø: 5.2 cm

Material

Chromeplated brass, red plastic cover and rubber bumper head. Stainless steel screws and silicone oil lubrication

Connections

Available with 1" or 2" male threads.
Optional swivelling connection.

Capacities Unifighter 10C

Pressure Bar	Fog 100°		Jet	
	lpm	Distance/m	lpm	Distance/m
3	108	max 7	108	10-14
6	152	max 11	152	18-22
8	177	max 12	177	21-24
10	197	max 13	197	22-26


Capacities Unifighter 7C

Pressure Bar	Fog 100°		Jet	
	lpm	Distance/m	lpm	Distance/m
3	53	max 4	53	11-13
6	76	max 6	76	15-17
8	89	max 7	89	16-19
10	99	max 8	99	17-20



Article No: VMU20110 / 20120

Unifire V20 Nozzle

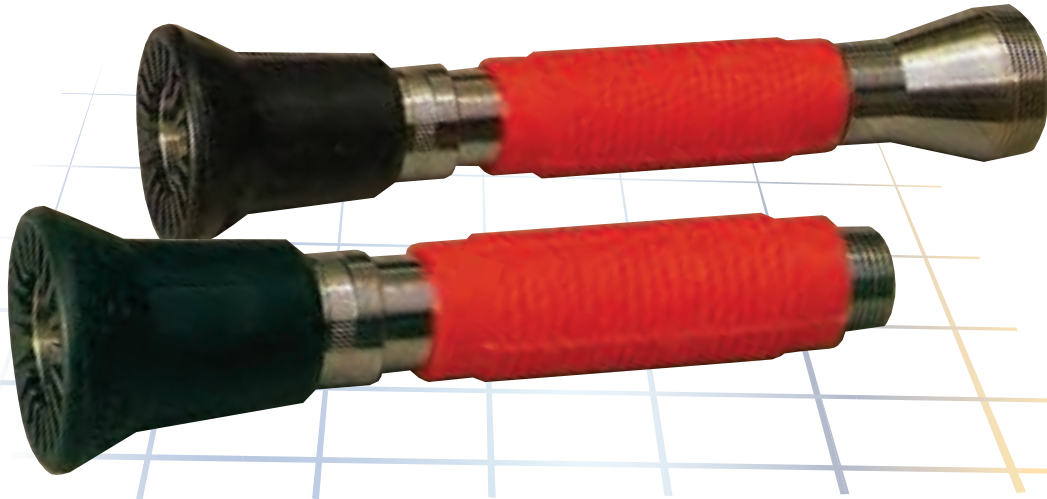

The Unifire V-nozzle is a multi-purpose fognozzle with very good performance for both fog and jet. The V-nozzles are available in both long and short versions. The V-nozzle can be combined with an attachable foam-tube for heavy and medium foam. The V-nozzles are used on a number of Unifire products. Look for the V-nozzle logotype.



How to operate

Twist the nozzle head to select spray-pattern
-Stepless adjustable from shut-off via jet to 90° fog.

Applications

Fireextinguishing with fog or jet. Proven very reliable. Designed for heavy professional use.

Operating pressure

2 - 12 Bar

Material

Chromeplated brass, red plastic cover and rubber bumper head.

Weight & Measurements (With 2" conn.)

Length: 330 mm
Nozzle Ø: 80 mm
Weight: 1.7 kgs

Connections

1" or 2" BSP Male thread. (Short version 1" female)

The UNIFIRE V-nozzles are available in sizes 7, 10, 12, 14, 16, 18, and 20

Maintenance / Spareparts

The nozzle is practically maintenance-free. Only spare part is the baffle and its screw.

Approvals

Nozzle approved by: Lloyd's & Det Norske Veritas
Mfg'd at ISO 9001:2000 & 14001:2004 certified facilities


Capacities UNIFIRE V20 nozzle

Pressure Bar	Jet		Fog 90 °	
	Flow lpm	Range meters	Flow lpm	Range meters
2	252	27	285	11
6	442	37	480	13
10	576	43	650	16



Article No: VMU18110 / 18120

Unifire V18 Nozzle

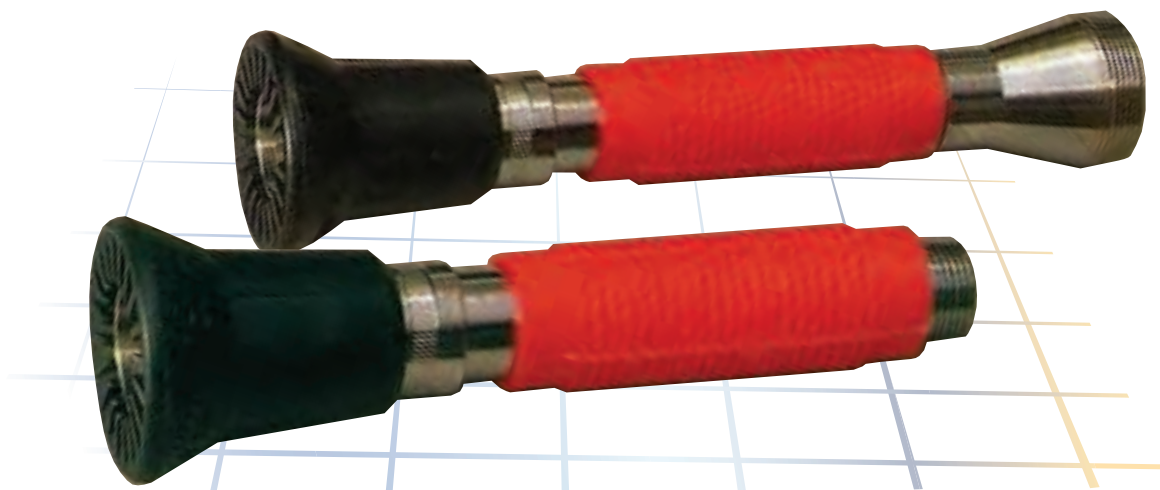

The Unifire V-nozzle is a multi-purpose fognozzle with very good performance for both fog and jet. The V-nozzles are available in both long and short versions. The V-nozzle can be combined with an attachable foam-tube for heavy and medium foam. The V-nozzles are used on a number of Unifire products. Look for the V-nozzle logotype.



How to operate

Twist the nozzle head to select spray-pattern
-Stepless adjustable from shut-off via jet to 90° fog.

Applications

Fireextinguishing with fog or jet. Proven very reliable.
Designed for heavy professional use.

Operating pressure

2 - 10 Bar

Material


Chromeplated brass, red plastic cover and rubber bumper head.

Weight & Measurements (With 2" conn.)

Length: 330 mm
Nozzle Ø: 80 mm
Weight: 1.7 kgs

Connections

1" or 2" BSP Male thread. (Short version 1" female)



The UNIFIRE V-nozzles are available in sizes 7, 10, 12, 14, 16, 18, and 20

Maintenance / Spareparts

The nozzle is practically maintenance -free. Only spare part is the baffle and its screw.

Approvals

Nozzle approved by: Det Norske Veritas

Mfg'd at ISO 9001:2000 & 14001:2004 certified facilities


Capacities UNIFIRE V18 nozzle

Pressure Bar	Jet		Fog 90 °	
	Flow lpm	Range meters	Flow lpm	Range meters
2	226	26	265	11
6	396	36	465	13
10	511	42	605	16



Article No: VMU16110 / 16120

Unifire V16 Nozzle

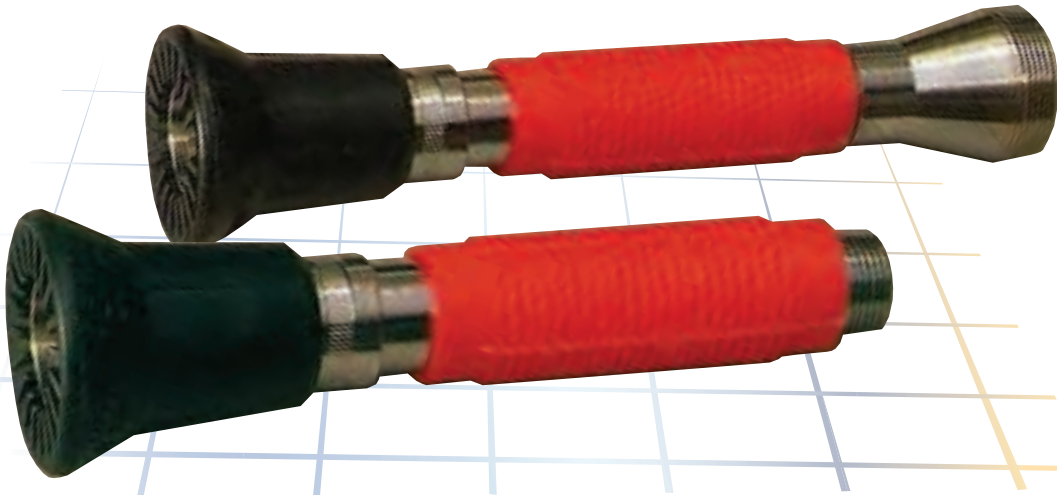

The Unifire V-nozzle is a multi-purpose fognozzle with very good performance for both fog and jet. The V-nozzles are available in both long and short versions. The V-nozzle can be combined with an attachable foam-tube for heavy and medium foam. The V-nozzles are used on a number of Unifire products. Look for the V-nozzle logotype.



How to operate

Twist the nozzle head to select spray-pattern
-Stepless adjustable from shut-off via jet to 90° fog.

Applications

Fireextinguishing with fog or jet. Proven very reliable. Designed for heavy professional use.

Operating pressure

2 - 10 Bar.

Material

Chromeplated brass, red plastic cover and rubber bumper head.

Weight & Measurements (With 2" conn.)

Length: 330 mm
Nozzle Ø: 80 mm
Weight: 1.7 kgs

Connections

1" or 2" BSP Male thread. (Short version 1" female)



The UNIFIRE V-nozzles are available in sizes 7, 10, 12, 14, 16, 18, and 20

Maintenance / Spareparts

The nozzle is practically maintenance-free. Only spare part is the baffle and its screw.

Approvals

Nozzle approved by: Det Norske Veritas

Mfg'd at ISO 9001:2000 & 14001:2004 certified facilities


Capacities UNIFIRE V16 nozzle

Pressure Bar	Jet		Fog 90 °	
	Flow lpm	Range meters	Flow lpm	Range meters
2	205	26	240	10
6	356	34	405	13
10	462	40	550	14



Article No: VMU14110 / 141120

Unifire V14 Nozzle

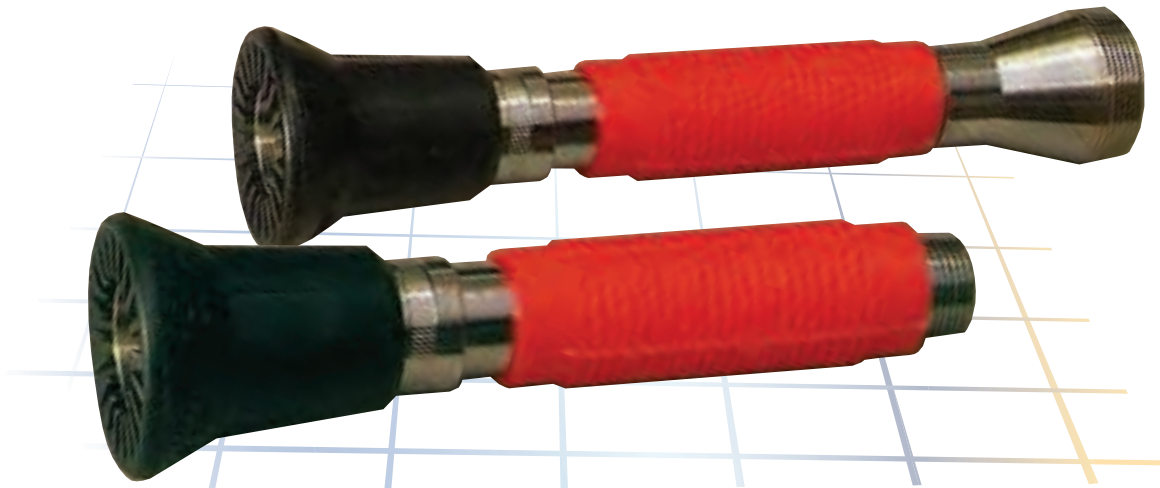

The Unifire V-nozzle is a multi-purpose fognozzle with very good performance for both fog and jet. The V-nozzles are available in both long and short versions. The V-nozzle can be combined with an attachable foam-tube for heavy and medium foam. The V-nozzles are used on a number of Unifire products. Look for the V-nozzle logotype.



How to operate

Twist the nozzle head to select spray-pattern
-Stepless adjustable from shut-off via jet to 90° fog.

Applications

Fireextinguishing with fog or jet. Proven very reliable.
Designed for heavy professional use.

Operating pressure

2 - 12 Bar

Material

Chromeplated brass, red plastic cover and rubber bumper head.

Weight & Measurements (With 2" conn.)

Length: 330 mm
Nozzle Ø: 80 mm
Weight: 1.7 kgs

Connections

1" or 2" BSP Male thread. (Short version 1" female)



The UNIFIRE V-nozzles are available in sizes 7, 10, 12, 14, 16, 18, and 20

Maintenance / Spareparts

The nozzle is practically maintenance -free. Only spare part is the baffle and its screw.

Approvals

Nozzle approved by: Det Norske Veritas

Mfg'd at ISO 9001:2000 & 14001:2004 certified facilities


Capacities UNIFIRE V14 nozzle

Pressure Bar	Jet		Fog 90 °	
	Flow lpm	Range meters	Flow lpm	Range meters
2	166	23	210	10
6	291	33	370	13
10	376	38	490	14



Article No: VMU12110 / 12120

Unifire V12 Nozzle

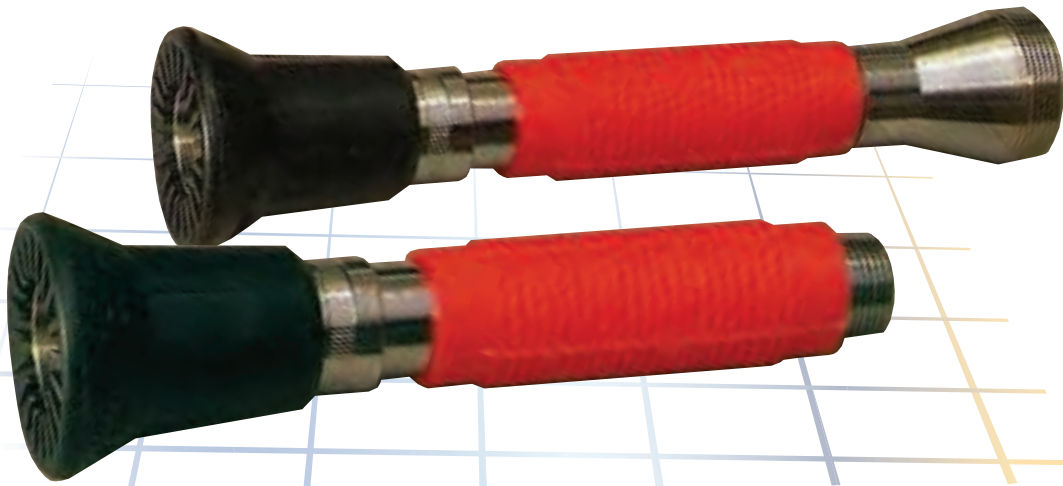

The Unifire V-nozzle is a multi-purpose fognozzle with very good performance for both fog and jet. The V-nozzles are available in both long and short versions. The V-nozzle can be combined with an attachable foam-tube for heavy and medium foam. The V-nozzles are used on a number of Unifire products. Look for the V-nozzle logotype.



How to operate

Twist the nozzle head to select spray-pattern
-Stepless adjustable from shut-off via jet to 90° fog.

Applications

Fireextinguishing with fog or jet. Proven very reliable.
Designed for heavy professional use.

Operating pressure

2 - 12 Bar

Material

Chromeplated brass, red plastic cover and rubber bumper head.

Weight & Measurements (With 2" conn.)

Length: 330 mm
Nozzle Ø: 80 mm
Weight: 1.7 kgs

Connections

1" or 2" BSP Male thread. (Short version 1" female)



The UNIFIRE V-nozzles are available in sizes 7, 10, 12, 14, 16, 18, and 20

Maintenance / Spareparts

The nozzle is practically maintenance -free. Only spare part is the baffle and its screw.

Approvals

Nozzle approved by: Det Norske Veritas


Mfg'd at ISO 9001:2000 & 14001:2004 certified facilities

Capacities UNIFIRE V12 nozzle

Pressure Bar	Jet		Fog 90 °	
	Flow lpm	Range meters	Flow lpm	Range meters
2	134	22	184	10
6	233	32	325	13
10	302	37	400	14

Article No: VMU10110 / 10120

Unifire V10 Nozzle

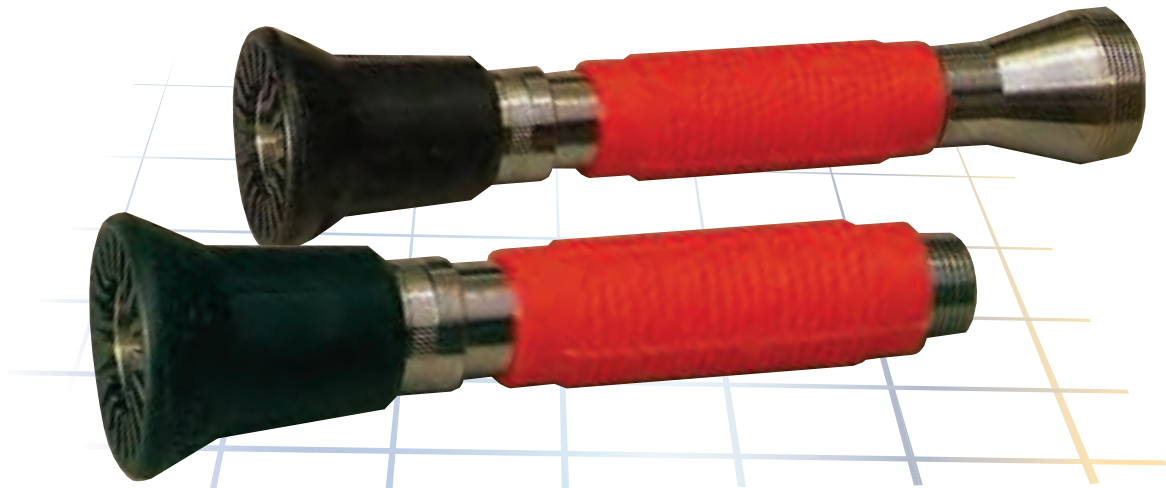

The Unifire V-nozzle is a multi-purpose fognozzle with very good performance for both fog and jet. The V-nozzles are available in both long and short versions. The V-nozzle can be combined with an attachable foam-tube for heavy and medium foam. The V-nozzles are used on a number of Unifire products. Look for the V-nozzle logotype.



How to operate

Twist the nozzle head to select spray-pattern
-Stepless adjustable from shut-off via jet to 90° fog.

Applications

Fireextinguishing with fog or jet. Proven very reliable.
Designed for heavy professional use.

Operating pressure

2 - 12 Bar

Material

Chromeplated brass, red plastic cover and rubber bumper head.

Weight & Measurements (With 2" conn.)

Length: 330 mm
Nozzle Ø: 80 mm
Weight: 1.7 kgs

Connections

1" or 2" BSP Male thread. (Short version 1" female)



The UNIFIRE V-nozzles are available in sizes 7, 10, 12, 14, 16, 18, and 20

Maintenance / Spareparts

The nozzle is practically maintenance -free. Only spare part is the baffle and its screw.

Approvals

Nozzle approved by: Det Norske Veritas

Mfg'd at ISO 9001:2000 & 14001:2004 certified facilities


Capacities UNIFIRE V10 nozzle

Pressure Bar	Jet		Fog 90 °	
	Flow lpm	Range meters	Flow lpm	Range meters
2	95	18	179	10
6	163	31	315	10
10	211	36	365	13



Article No: VMU07110 / 07120

Unifire V7 Nozzle

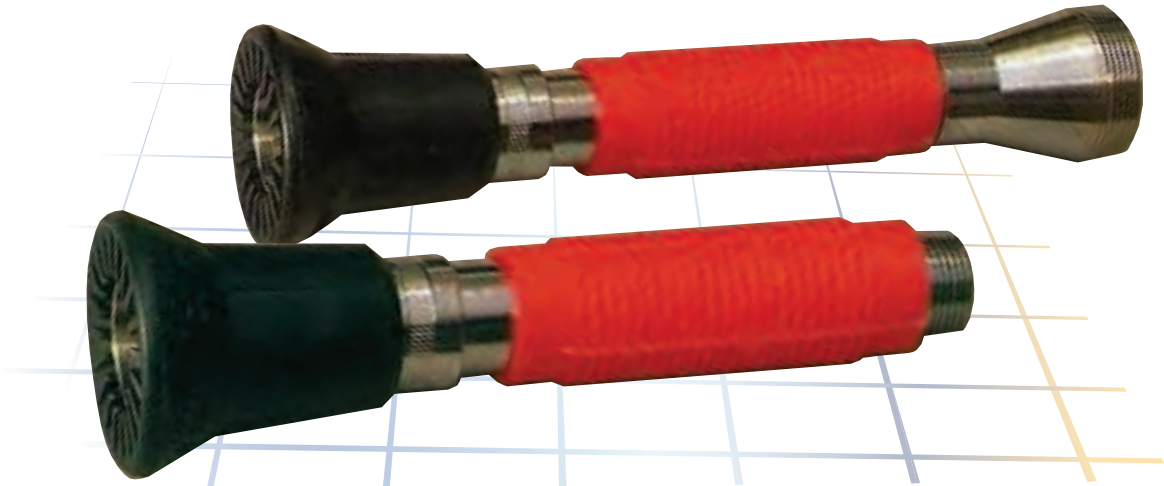

The Unifire V-nozzle is a multi-purpose fognozzle with very good performance for both fog and jet. The V-nozzles are available in both long and short versions. The V-nozzle can be combined with an attachable foam-tube for heavy and medium foam. The V-nozzles are used on a number of Unifire products. Look for the V-nozzle logotype.



How to operate

Twist the nozzle head to select spray-pattern
-Stepless adjustable from shut-off via jet to 90° fog.

Applications

Fireextinguishing with fog or jet. Proven very reliable.
Designed for heavy professional use.

Operating pressure

2 - 12 Bar

Material

Chromeplated brass, red plastic cover and rubber bumper head.

Weight & Measurements (With 2" conn.)

Length: 330 mm
Nozzle Ø: 80 mm
Weight: 1.7 kgs

Connections

1" or 2" BSP Male thread. (Short version 1" female)



The UNIFIRE V-nozzles are available in sizes 7, 10, 12, 14, 16, 18, and 20

Maintenance / Spareparts

The nozzle is practically maintenance -free. Only spare-part is the baffle and its screw.

Approvals

Nozzle approved by: Det Norske Veritas


Mfg'd at ISO 9001:2000 & 14001:2004 certified facilities

Capacities UNIFIRE V7 nozzle

Pressure Bar	Jet		Fog 90°	
	Flow lpm	Range meters	Flow lpm	Range meters
2	55	17	155	7
6	98	28	270	9
10	130	32	290	10



V-Nozzle Pistol for firefighting and industrial use

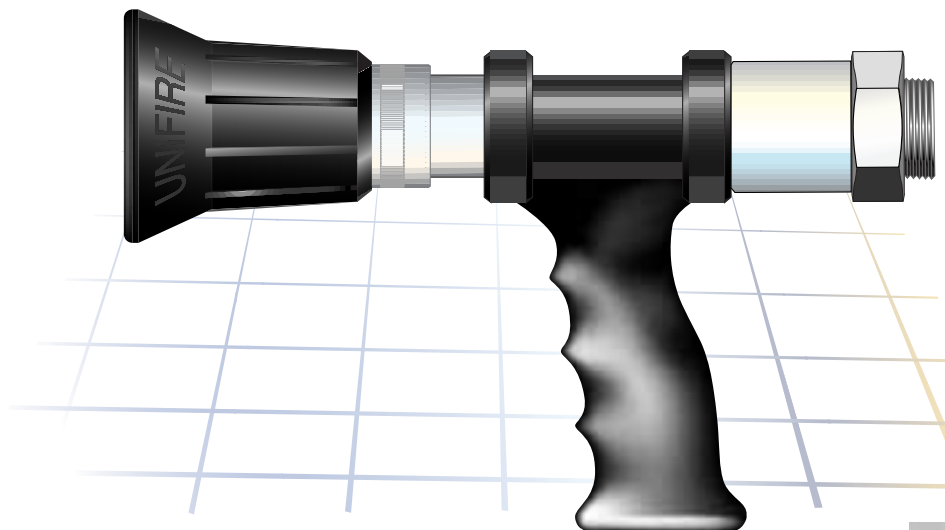

The Unifire V-nozzle is a multi-purpose fognozzle with very good performance for both fog and jet. The V-nozzles are available in both long and short versions. The V-nozzles are used on a number of Unifire products. Look for the V-nozzle logotype.



The UNIFIRE V-nozzles are available in sizes 12, 16 and 20

How to operate

Twist the nozzle head to select spray-pattern
-Stepless adjustable from shut-off via jet to 90° fog.

Applications

Fireextinguishing with fog or jet. Proven very reliable.
Designed for heavy professional use.

Operating pressure

Recommended operating pressure: 2 - 12 Bar
Max operating pressure 15 bar

Weight and measurements

Length: 210 mm Nozzle Ø : 80 mm
Weight with 1": 2,0 kg

Connections

1" or 2" BSP male threads

Material

Chromeplated brass, red plastic cover and rubber bumper head.

Maintenance and spareparts


The nozzle is practically maintenance-free. Only spare-part is the baffle and its screw.

Capacities Unifire V-nozzles


Pressure Bar	Jet		Fog 90°	
	Flow lit/min	Range meters	Flow lit/min	Range meters
V12				
2	134	22	184	10
6	233	32	325	13
10	302	37	400	14
V16				
2	205	26	240	10
6	356	34	405	13
10	462	40	550	14
V20				
2	252	27	285	11
6	442	37	480	13
10	576	43	650	16



Unifire *OUTPUT*

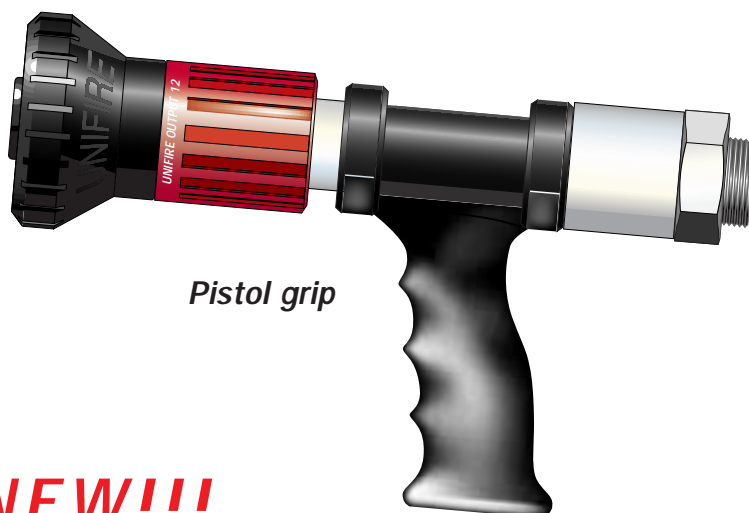

Pistol grip



Straight model



Attachable foampipes

NEW!!!

UNIFIRE OUTPUT - New Professional firefighting nozzle that puts safety of the operator in focus. Generate a wide, full and effective protecting fogscreen immediately when opened. A minimum of moving parts means maximum reliability. Well suited for ACTION-technique extinguishing. Moving parts are not affected by the waterpressure.

Available models

Supplied with ergonomic pistolgrip and swivelling connection. Also available as straight version. Flowcapacities 12, 14 or 16 mm. Excellent for non-aspirating foam applications or low and medium expansion foam with attachable foam pipe

Operation

Twist the nozzle head to open. Generates a wide, full fogscreen. 3/4 of a turn from shut to jet position.

Operating pressure

Recommended operating pressure 3-15 bar
Max operating pressure 20 bar

Weight and measurements

Weight: 2,6 kg pistolgrip, 1" swivelling connection
Length with 1" threads: 310 mm,
Handle length: 120 mm
Rubber head Ø : 83 mm

Connections

1" or 2" BSP male threads

Material

Brass, stainless steel, solid rubber bumper and handle.

Capacities 12 mm version*

Pressure (Bar)	Fog 100°		Jet	
	Flow (lpm)	Range (m)	Flow (lpm)	Range (m)
6	220	10	220	30
10	285	12	285	33

Capacities 14 mm version*

Pressure (Bar)	Fog 100°		Jet	
	Flow (lpm)	Range (m)	Flow (lpm)	Range (m)
6	300	12	300	34
10	380	14	380	37

Capacities 16 mm version*

Pressure (Bar)	Fog 100°		Jet	
	Flow (lpm)	Range (m)	Flow (lpm)	Range (m)
6	410	14	410	38
10	510	18	510	42

*= approximate calculated values.

Article No: JET30110 / 30120

JET SET Fog/Jet Nozzle



How to operate

Twist the nozzle head to select flow and fog angle.
Shut off › Mini Jet › Protecting screen ›
Long range fog › 300 lpm Jet › 150 lpm Jet

Applications

Firefighting with fog or jet. Supplies multiple setting-choices, merely selected by twisting the nozzle head.

Operating pressure

2 - 10 bar

Weight

2.3 Kg with 2" thread connection


Measurements

Length: 38 cm with 2" thread connection
Nozzle Ø: 8.3 cm

Connections

1" or 2" BSP male threads

Capacities

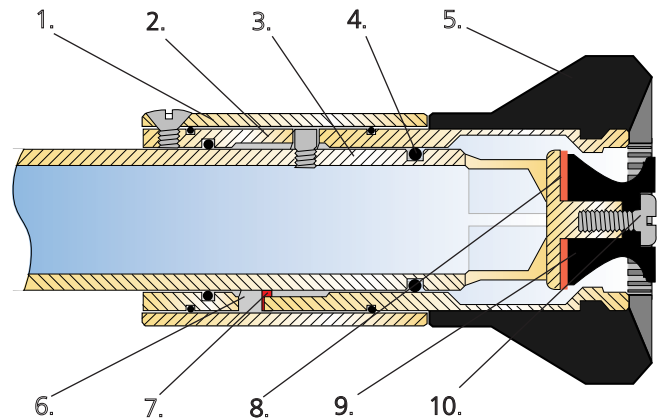

Material


1. Friction CoverChromeplated Brass
2. ManeuveringChromeplated Brass
3. CenterChromeplated Brass
4. O-rings.....Nitril rubber
5. Rubber HeadHigh quality rubber
6. OilSilicone oil
7. Max Fog FixBrass
8. SealVulkolan
9. Baffle.....Delrin
10. Screws (All).....Stainless steel
11. Handle (Cover)PVC (plastic)

Pressure Bar	Mini Jet		Fog 110°		Full Jet		Half Jet	
	Flow lpm	Range meters	Flow lpm	Range meters	Flow lpm	Range meters	Flow lpm	Range meters
6	0-55	19	310	9-15	315	31	160	28
10	0-72	25	390	17-25	370	37	190	36



Article No: JET30310 / 30320

JETSET Pistol Fog/Jet Nozzle

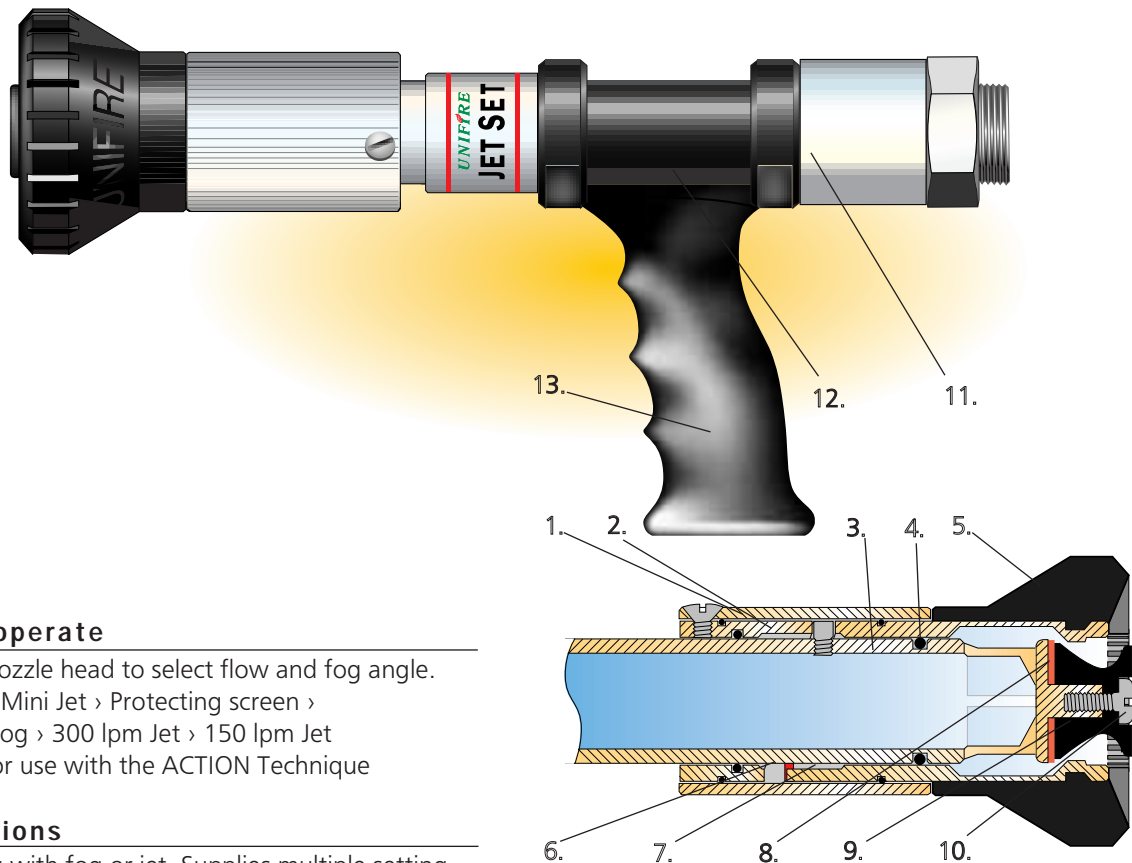

How to operate

Twist the nozzle head to select flow and fog angle.
Shut off › Mini Jet › Protecting screen ›
20° Powerfog › 300 lpm Jet › 150 lpm Jet
Intended for use with the ACTION Technique

Applications

Firefighting with fog or jet. Supplies multiple setting-choices, merely selected by twisting the head.

Operating pressure

2 - 10 Bar

Weight

2.6 Kg with 1" BSP male threads

Measurements

Length: 33 cm with 1" male threads
Nozzle Ø: 8.3 cm

Connections

1" or 2" BSP Male threads, swivelling connection.

Capacities

Material

1. Friction CoverChromeplated Brass
2. ManeuveringChromeplated Brass
3. CenterChromeplated Brass
4. O-rings.....Nitril rubber
5. Rubber HeadChloroprene rubber
6. LubricationSilicone oil
7. Max Fog Fix rollBrass
8. SealVulkolan
9. Baffle.....POM
10. Screws (All).....Stainless steel
11. Swivel.....Chromeplated Brass /Teflon
12. Pipes.....Acidproof stainless steel
13. Pistol Grip.....Rubber / Stainless steel

Pressure Bar	Mini Jet		Fog 110°		Full Jet		Half Jet	
	Flow lpm	Range meters	Flow lpm	Range meters	Flow lpm	Range meters	Flow lpm	Range meters
6	0-55	19	310	9-15	315	31	160	28
10	0-72	25	390	17-25	370	37	190	36



UNIFIRE



UNIFIRE NOZZLES AB • Bultgatan 40B • 442 40 Kungälv • Sweden
Tel +46 70 640 47 43 • info@unifirenozzles.com
www.UnifireNozzles.com